

# Wireless Sensor Network for Aircraft Health Monitoring\*

Haowei Bai  
Honeywell Labs  
3660 Technology Drive  
Minneapolis, MN 55418  
haowei.bai@honeywell.com

Mohammed Atiquzzaman  
School of Computer Science  
University of Oklahoma  
Norman, OK 73019-6151  
atiq@ou.edu

David Lilja  
Electrical Engineering  
University of Minnesota  
200 Union St. SE  
Minneapolis, MN 55455  
lilja@ece.umn.edu

August 12, 2004

## Abstract

Wireless Sensor networks is an emerging paradigm of computing and networking where a node may be self-powered, and have sensing, computing, and communication capabilities. They have been proposed for use in a wide variety of applications. The objective of this article is to describe a wireless sensor network for monitoring of the health of aircraft engines. We describe the architecture of the wireless sensor network along with how it fits into the general area of wireless sensor networks.

## 1 Introduction

Modern physical systems, such as those used in aircrafts, are becoming more and more complex. This increase in system complexity has led to an increased desire for automated prognostic and health monitoring systems. One particular aircraft system in which prognosis and health monitoring capability becoming increasingly desirable is aircraft engine system. To provide such capabilities, however, a number of sensors of varying types may be mounted on the engine, or inside the engine, to sense various physical parameters (such as, operation temperature, oil temperature, vibration, pressure, etc.) associated with engine operation. Using a network of sensors, these physical parameters can be transmitted to a central processing unit using wiring and multiple wiring harnesses for further prognostic analysis, or engine health prediction. These wiring and wiring harnesses can increase overall system weight and cost, and can reduce overall system reliability. Therefore, there is a need for a system and a method of providing various aircraft engine parameters without using wiring and multiple wiring harnesses.

As a design example of wireless sensor networks, in this article, we describe how the concept invented at Honeywell Labs has addressed these needs of engine health monitoring applications. The rest of the paper is organized as follows. We describe in detail the architecture

\*The concept and the design described in this article are patent pending.

of a wireless sensor network for monitoring of aircraft engine health in Sec. 2, and its single chip solution in Sec. 3. We summarize this article in Sec. 4.

## 2 System Integration

An aircraft engine wireless sensor network includes a number of wireless sensor communication nodes and a central engine control unit (i.e., engine controller) in operable communication with each other. Each wireless sensor communication node can communicate directly with the engine controller, or through one or more other wireless sensor communication nodes in the network. A detailed description of each subsystem and the integration of subsystems are presented below.

The functional block diagram of a wireless sensor communication node is shown in Figure 1, where a wireless sensor communication node includes three main sections, a sensor section, a communication control section, and a power supply section.

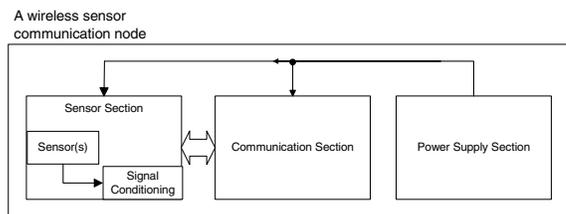


Figure 1: The functional diagram of a wireless sensor communication node.

### 2.1 Sensor and Data Collection

The sensor section includes one or more sensors (e.g., temperature sensors, pressure sensors, vibration sensors, proximity sensors, and position sensors, etc.), and appropriate signal conditioning circuitry. The signal conditioning circuitry receives the sensor signal from the sensor and conditions the sensor signal, as appropriate, for further processing in the communication section.

signal conditioning circuitry may or may not be used in the system. The appropriate signal conditioning may also be implemented in the communication section.

## 2.2 Communication and Control

Figure 2 shows a block diagram of the communication control section, which includes a communication controller and a single-chip radio transceiver. The single-

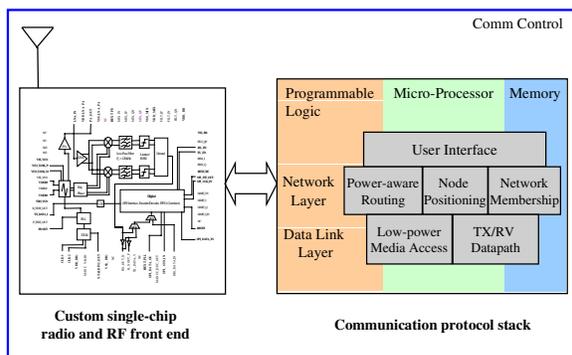


Figure 2: The functional diagram of communication control.

chip radio transceiver, designed and manufactured by Honeywell International, is implemented using the BFSK (Binary Phase Shift Key) modulation, and Frequency Hopping Spread Spectrum (FHSS) multiple access. As shown in Figure 3, the single-chip radio transceiver consists of a digital data interface, a frequency synthesizer, a transmitter (Tx) and a receiver (Rx).

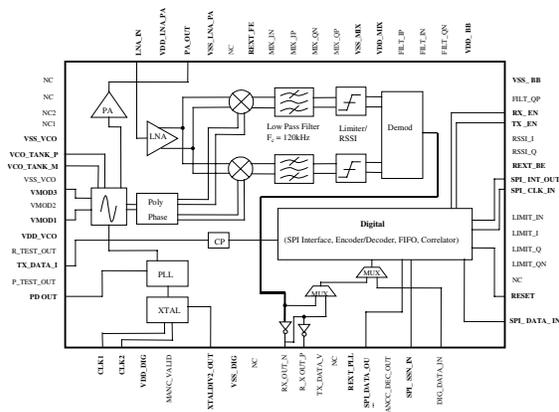


Figure 3: The block diagram of Honeywell single-chip radio transceiver.

The microprocessor and programmable logic in the communication protocol stack implement various communication control functions, which are represented as protocol modules in Figure 2 and stored in memory. These communication protocol modules include a **power**

**aware routing module, a node positioning module, a network membership module, and a low-power media access module** as described below.

**Power aware routing module:** The functionality of the power aware routing module is illustrated in Figure 4, which depicts a sensor communication network having eight nodes that include seven wireless sensor nodes 200 (i.e., 200-1 through 200-7), and the engine central control unit 100. As Figure 4 illustrates, each wireless sensor node transmits its own power capability data to, and receives power capability data from, one or more other sensor nodes. Based on the power capability data each wireless sensor node receives, it determines the optimum data transmission route through the wireless sensor communication network. In particular, the power aware routing module determines a data transmission route that preferably routes the data to its intended destination via other wireless sensor nodes that have the greatest power capability. In the example shown in Figure 4, it was determined that sensor data from wireless sensor node 200-1 should be routed to the engine central control unit 100 via wireless sensor nodes 200-2, 200-4, 200-5, and 200-7. The power aware routing module may be implemented with, for example, Ad-hoc On-demand Distance Vector routing (AODV), Dynamic Source Routing (DSR), and Global State Routing (GSR). The power aware routing module, when used with these other schemes, provides an added level of enhancement to these other routing schemes.

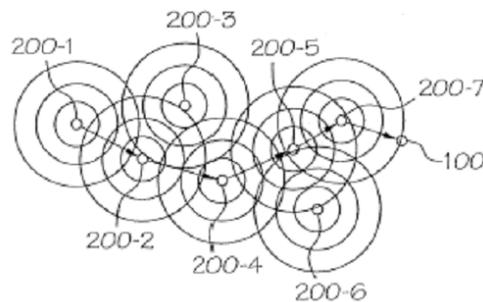


Figure 4: The illustration of a power-aware routing example.

**Node positioning module:** It is desirable that each wireless sensor node, in addition to transmitting sensor data and power capability data, also transmits data representative of its position. This position data could be the physical location of the region or device where the parameter being sensed. If the sensor is located in a fixed position, then this position data will likely be a constant. If, however, the wireless sensor is located such that its position may change, then the position data will also change. In this latter case, a sensor with positioning capability (e.g., positioning by variation of magnetic strength) should be used to generate and update the position data that it transmits. Similar to the power capability data, each wireless sensor node in the net-

work transmits its position data to, and receives position data from, some or all of the other wireless sensor nodes. Moreover, the position data is preferably transmitted simultaneously with the sensor data and the power capability data. The position data allows a receiving node, be it a sensor node or the engine central control unit, to determine where the sensor data came from.

**Network membership module:** The network membership module provides identification and authentication functionalities for each wireless sensor node. The network membership module supplies identification data that uniquely identifies each wireless sensor node in the network. The network membership module uses the received identification data to determine if the wireless sensor node that transmitted the identification data is a member of the network. The network membership module also determines the number of wireless sensor nodes that are presently active in the network. In addition, the network membership module also determines when a wireless sensor node joins and leaves the network. Moreover, the network membership module also performs an authentication function. Specifically, when a wireless sensor node receives data from another wireless sensor node, the network membership module can parse the data received to determine whether the received data was transmitted from a node that is presently a member of the network, or can be allowed membership within the network.

**Media access module:** The low-power media access module may implement a media access schedule that is similar to Time Division Multiple Access (TDMA), rather than the conventional random access. In other words, each wireless sensor node is assigned a given access time to the network. During its access time, a wireless sensor node may attempt to gain access to the transmission medium either one or multiple times as needed. If access fails after a predetermined number of times, the node may place itself in sleep mode. By providing access to the transmission medium in accordance with an access schedule, the wireless sensor node will likely use less power as compared to a configuration in which random access to the transmission medium is attempted. The low-power media access module is also configured such that the wireless sensor node will place itself in sleep mode whenever it is neither sending nor receiving data. This functionality can provide significant power savings.

### 2.3 Power Supply

The power supply section is to supply electrical power to the sensor section and the communication control section. The power supply may be any one of numerous types of stand-alone electrical power supplies. For example, the power supply may include one or more batteries and appropriate signal conditioning circuitry, or it may be a thermoelectric power supply that is driven by temperature gradients on the engine. It also could be a vibration-powered generator that is driven by en-

gine vibration and converts mechanical power to electrical power. These power scavenging mechanisms can be implemented using Micro Electro Mechanical System (MEMS) technology to make the size of a node as small as possible.

## 3 Single Chip Solution

The communication control section of a wireless sensor node, depicted in Figure 2, is implemented as two physically separate parts. However, the communication controller and transceiver can be implemented in a single integrated circuit chip. Particularly, such an integrated circuit chip is implemented with Honeywell state-of-art Silicon On Insulator (SOI) technology, which will allow the integrated circuit chip to operate in an environment (such as aircraft engine) with up to 250C temperature. SOI is a semiconductor fabrication technique developed by IBM that uses pure crystal silicon and silicon oxide for integrated circuits (ICs) and microchips. A schematic of the SOI-based single chip solution is shown in Figure 5.

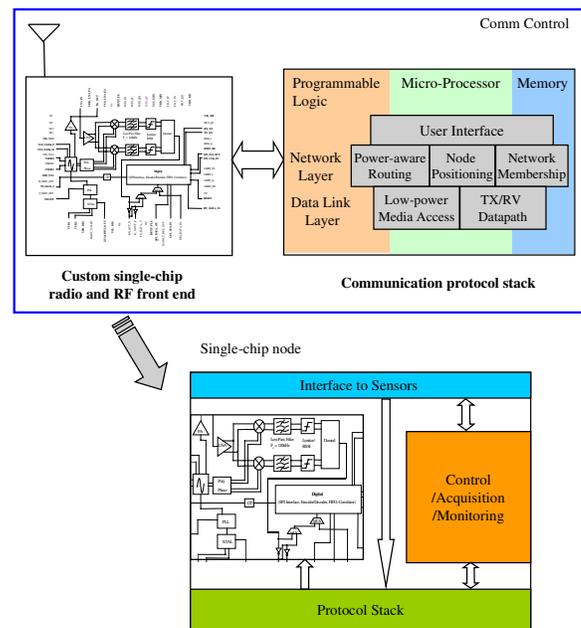


Figure 5: The single chip solution.

## 4 Conclusions

Wireless sensor networks is an emerging research area with application in many fields. In this paper, we have described in detail the architecture of a wireless sensor network which can be used to monitor the health of aircraft engines. The wireless sensor network is being fabricated for real world testing. Future extension of this work consists of performance evaluation of the wireless sensor network and field tests for monitoring of engine health.